

[Access Full Complete Solution Manual Here](#)

Table of Contents

Preface	
1. Introduction	1
2. Equations for Steady One-Dimensional Compressible Fluid Flow	25
3. Some Fundamental Aspects of Compressible Flow	42
4. One-Dimensional Isentropic Flow	67
5. Normal Shock Waves	120
6. Oblique Shock Waves	200
7. Expansion Waves: Prandtl–Meyer Flow	248
8. Variable Area Flow	305
9. Adiabatic Flow in a Duct with Friction	437
10. Flow with Heat Transfer	536
11. Hypersonic Flow	639
12. High-Temperature Flows	655
13. Low-Density Flows	674
14. An Introduction to Two-Dimensional Compressible Flow	683

Chapter One

INTRODUCTION

SUMMARY OF MAJOR EQUATIONS

Perfect Gas Relations

$$\frac{p}{\rho} = RT = \left(\frac{R}{m}\right)T \quad (1.1)$$

$$\gamma = \frac{c_p}{c_v} \quad (1.2)$$

$$R = c_p - c_v \quad (1.3)$$

Conservation Equations for Steady Flow

Conservation of Mass:

$$(\text{Rate mass enters control volume}) = (\text{Rate mass leaves control volume})$$

Conservation of Momentum:

$$\begin{aligned} &(\text{Net Force on Gas In Control Volume In Direction Considered}) = \\ &(\text{Rate Momentum leaves Control Volume in Direction Considered}) \\ &- (\text{Rate Momentum enters Control Volume in Direction Considered}) \end{aligned}$$

Conservation of Energy:

$$\begin{aligned} &(\text{Rate sum of Enthalpy and Kinetic Energy leave control volume}) \\ &- (\text{Rate sum of Enthalpy and Kinetic Energy enter control volume}) = \\ &(\text{Rate Heat is transferred into control volume}) - \\ &(\text{Rate Work is done by fluid in control volume}) \end{aligned}$$

PROBLEM 1.1

An air stream enters a variable area channel at a velocity of 30 m/s with a pressure of 120 kPa and a temperature of 10° C. At a certain point in the channel, the velocity is found to be 250 m/s. Using Bernoulli's equation (i.e. $p + \rho V^2 = \text{constant}$), which assumes incompressible flow, find the pressure at this point. In this calculation use the density evaluated at the inlet conditions. If the temperature of the air is assumed to remain constant, evaluate the air density at the point in the flow where the velocity is 250 m/s. Compare this density with the density at the inlet to the channel. On the basis of this comparison, do you think that the use of Bernoulli's equation is justified?

SOLUTION

Bernoulli's equation gives:

$$p_1 + \rho \frac{V_1^2}{2} = p_2 + \rho \frac{V_2^2}{2}$$

This can be rearranged to give:

$$p_2 = \rho \left[\frac{V_1^2}{2} - \frac{V_2^2}{2} \right] + p_1 \quad (\text{a})$$

The density, ρ , is evaluated using the initial conditions i.e. by using $p_1 / \rho = RT_1$, which, since air flow is being considered, gives:

$$\rho = \frac{p_1}{RT_1} = \frac{120 \times 10^3}{287 \times 283} = 1.478 \text{ kg/m}^3$$

Substituting this back into eq. (a) then gives:

$$p_2 = 1.478 \times \left[\frac{30^2}{2} - \frac{250^2}{2} \right] + 120 \times 10^3 = 7.448 \times 10^4 \text{ Pa} = 74.48 \text{ kPa}$$

Therefore the pressure at the point considered is 74.48 kPa.

Assuming that the changes in temperature can be neglected, the equation of state gives at the exit:

$$\rho_2 = \frac{p_2}{RT_2} = \frac{74.48 \times 10^3}{287 \times 283} = 0.917 \text{ kg/m}^3$$

Since this indicates that the density changes by about 38%, the incompressible flow assumption is not justified.

PROBLEM 1.2

The gravitational acceleration on a large planet is 90 ft/sec^2 . What is the gravitational force acting on a spacecraft with a mass of 8000 lbm on this planet?

SOLUTION

Because:

$$\text{Force} = \text{Mass} \times \text{Acceleration}$$

it follows that:

$$\text{Gravitational Force} = 8000 \times 90 \text{ lbm-ft/sec}^2$$

But $32.2 \text{ lbm-ft/sec}^2 = 1 \text{ lbf}$, so this equation gives:

$$\text{Gravitational Force} = \frac{800 \times 90}{32.2} = 22,360 \text{ lbf}$$

Therefore the gravitational force acting on the craft is 22,360 lbf

PROBLEM 1.3

The pressure and temperature at a certain point in an air flow are 130 kPa and 30° C respectively. Find the air density at this point in kg/m³ and lbm/ft.

SOLUTION

The density, ρ , is evaluated using the perfect gas law, i.e. by using $p/\rho = RT$. Using SI units this gives since air-flow is being considered:

$$\rho = \frac{130 \times 10^3}{287 \times 303} = 1.495 \text{ kg/m}^3$$

But 1 lbm = 0.4536 kg and 1 ft = 0.3048 m so:

$$1.495 \text{ kg/m}^3 = \frac{1.495/0.4536}{(1/0.3058)^3} = 0.0943 \text{ lbm/ft}^3$$

Therefore the density is 1.459 kg/m³ or 0.0943 lbm/ft³

PROBLEM 1.4

Two kilograms of air at an initial temperature and pressure of 30° C and 100 kPa undergoes an isentropic process, the final temperature attained being 850° C. Find the final pressure, the initial and final densities and the initial and final volumes.

SOLUTION

The isentropic relations give:

$$p_2 = \left(\frac{T_2}{T_1}\right)^{\gamma/(\gamma-1)} \times p_1 = \left(\frac{1123}{303}\right)^{1.4/(1.4-1)} \times 100 = 9801 \text{ kPa}_1$$

The initial density is given by the perfect gas law as:

$$\rho_1 = \frac{100 \times 10^3}{287 \times 303} = 1.15 \text{ kg/m}^3$$

The final density is given in the same way by:

$$\rho_2 = \frac{9801 \times 10^3}{287 \times 1123} = 30.41 \text{ kg/m}^3$$

Also, using:

$$\text{Volume} = \frac{\text{Mass}}{\text{Density}}$$

It follows that the initial and final volumes are given by:

$$V_1 = \frac{2}{1.150} = 1.739 \text{ m}^3$$

and:

$$V_2 = \frac{2}{30.41} = 0.0658 \text{ m}^3$$

Therefore the initial and final volumes are 1.739 m³ and 0.0658 m³.

PROBLEM 1.5

Two jets of air, each having the same mass flow rate, are thoroughly mixed and then discharged into a large chamber. One jet has a temperature of 120° C and a velocity of 100 m/s while the other has a temperature of 50° C and a velocity of 300 m/s. Assuming that the process is steady and adiabatic, find the temperature of the air in the large chamber.

SOLUTION

Using:

$$\text{Rate Mass Enters Control Volume} = \text{Rate Mass Leaves Control Volume}$$

and because the flow is adiabatic:

$$\begin{array}{l} \text{Rate Enthalpy plus} \\ \text{Kinetic Energy Leave} \\ \text{Control Volume} \end{array} - \begin{array}{l} \text{Rate Enthalpy plus} \\ \text{Kinetic Energy enter} \\ \text{Control Volume} \end{array} = 0$$

If the subscripts 1 and 2 are used to refer to conditions in the two jets and if the subscript 3 is used to refer to conditions in the chamber then, if m refers to the mass flow rate in each jet, the first of the above equations gives:

$$m_3 = m_1 + m_2 = 2m_i$$

where m_i is the mass flow rate in each of the jets, i.e., $m_i = m_1 = m_2$.

The second of the above equations then gives if the velocity in the chamber is assumed to be small because the chamber is large:

$$m_3 h_3 = m_1 \left(h_1 + \frac{V_1^2}{2} \right) + m_2 \left(h_2 + \frac{V_2^2}{2} \right)$$

Because air flow is involved it can be assumed that $h = c_p T$. Therefore the above equations together give if it is assumed that c_p is constant:

$$2m_i c_p T_3 = m_i \left(c_p \times 393 + \frac{100^2}{2} \right) + m_i \left(c_p \times 223 + \frac{300^2}{2} \right)$$

Dividing through by $m_i c_p$ then gives:

$$2T_3 = \left(393 + \frac{100^2}{2c_p} \right) + \left(223 + \frac{300^2}{2c_p} \right)$$

i.e. since air flow is involved:

$$T_3 = \frac{1}{2} \left[\left(393 + \frac{100^2}{2 \times 1007} \right) + \left(223 + \frac{300^2}{2 \times 1007} \right) \right] = 332.8\text{K}$$

Therefore the air temperature in the chamber is 332.8 K (= 59.8° C).

PROBLEM 1.6

Two air streams are mixed in a chamber. One stream enters the chamber through a 5 cm diameter pipe at a velocity of 100 m/s with a pressure of 150 kPa and a temperature of 30° C. The other stream enters the chamber through a 1.5 cm diameter pipe at a velocity of 150 m/s with a pressure of 75 kPa and a temperature of 30° C. The air leaves the chamber through a 9 cm diameter pipe at a pressure of 90 kPa and a temperature of 30° C. Assuming that the flow is steady find the velocity in the exit pipe.

SOLUTION

The flow situation being considered is shown in Fig. P1.6.

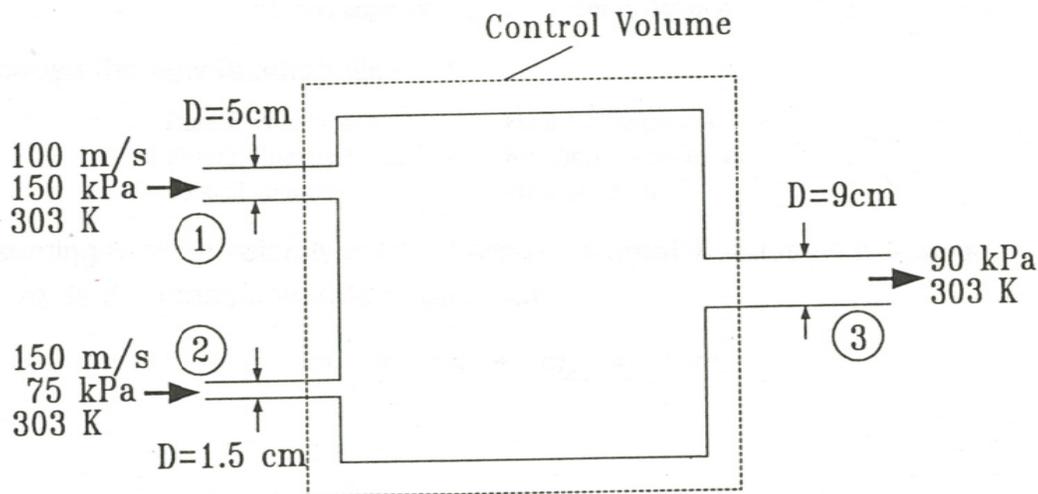


Figure P1.6

The densities in the three pipes are evaluated using the perfect gas law i.e. using $p/\rho = RT$. This gives:

$$\rho_1 = \frac{150 \times 10^3}{287 \times 303} = 1.725\text{ kg/m}^3$$

$$\rho_2 = \frac{75 \times 10^3}{287 \times 303} = 0.863 \text{ kg/m}^3$$

$$\rho_3 = \frac{90 \times 10^3}{287 \times 303} = 1.035 \text{ kg/m}^3$$

Conservation of mass gives since the flow is steady:

$$m_1 + m_2 = m_3$$

i.e.:

$$\rho_1 V_1 A_1 + \rho_2 V_2 A_2 = \rho_3 V_3 A_3$$

Hence:

$$1.725 \times 100 \times \frac{\pi}{4} \times 0.05^2 + 0.863 \times 150 \times \frac{\pi}{4} \times 0.015^2 = 1.035 \times V_3 \times \frac{\pi}{4} \times 0.09^2$$

which gives:

$$V_3 = 54.9 \text{ m/s}$$

Therefore the velocity in the exit pipe is 54.9 m/s.

PROBLEM 1.7

The jet engine fitted to a small aircraft uses 35 kg/s of air when the aircraft is flying at a speed of 800 km/h. The jet efflux velocity is 590 m/s. If the pressure on the engine discharge plane is assumed to be equal to the ambient pressure and if effects of the mass of the fuel used are ignored, find the thrust developed by the engine.

SOLUTION

The flow relative to the aircraft is considered. The momentum equation applied to a control volume surrounding the aircraft then gives in the direction of flight:

$$\text{Net Force on Gas in} \quad \text{Rate Momentum Leaves} \quad \text{Rate Momentum Enters}$$
$$\text{Control Volume} \quad \text{Control Volume} \quad \text{Control Volume}$$

But the pressure is equal to ambient everywhere on the surface of the control volume and only the air that passes through the engine undergoes a velocity change, i.e., a momentum change. Hence if F is the force exerted on the fluid by the system (this will be equal in magnitude but opposite in direction to the force on the aircraft, i.e., to the thrust), it follows that:

$$T = \dot{m} (V_{\text{exit}} - V_{\text{inlet}})$$

This gives because $V_{\text{inlet}} = 800 \text{ km/hr} = 222.2 \text{ m/s}$:

$$T = 35 \times (590 - 222.2) = 12873 \text{ N}$$

Therefore, the thrust developed by the engine is 12.87 kN.

PROBLEM 1.8

The engine of a small jet aircraft develops a thrust of 18 kN when the aircraft is flying at a speed of 900 km/h at an altitude where the ambient pressure is 50 kPa. The air flow rate through the engine is 75 kg/s and the engine uses fuel at a rate of 3 kg/s. The pressure on the engine discharge plane is 55 kPa and the area of the engine exit is 0.2 m². Find the jet efflux velocity.

SOLUTION

The flow relative to the aircraft is considered and the momentum equation is applied a control volume surrounding the aircraft. This gives in the direction of flight:

$$\begin{array}{ccc} \text{Net Force on Gas in} & \text{Rate Momentum Leaves} & \text{Rate Momentum Enters} \\ \text{Control Volume} & \text{Control Volume} & \text{Control Volume} \end{array}$$

But the pressure is equal to ambient everywhere on the surface of the control volume except on the nozzle exit plane. Hence if T is the force exerted on the flow by the system (this will be equal in magnitude but opposite in direction to the force on the aircraft, i.e., to the thrust). it follows that:

$$T - (p_{\text{exit}} - p_{\text{ambient}})A_{\text{exit}} = \dot{m}V_{\text{exit}} - \dot{m}V_{\text{inlet}}$$

This gives because $V_{\text{inlet}} = 900 \text{ km/hr} = 250 \text{ m/s}$:

$$18000 - (55000 - 50000) \times 0.2 = (75 + 3)V_{\text{exit}} - 75 \times 250$$

Hence:

$$V_{\text{exit}} = 458.3 \text{ m/s}$$

Therefore the jet efflux velocity is 458.3 m/s.

PROBLEM 1.9

A small turbo-jet engine uses 50 kg/s of air and the air/fuel ratio is 90:1. The jet efflux velocity is 600 m/s. When the afterburner is used, the overall air/fuel ratio decreases to 50:1 and the jet efflux velocity increases to 730 m/s. Find the static thrust with and without the afterburner. The pressure on the engine discharge plane can be assumed to be equal to the ambient pressure in both cases.

SOLUTION

The momentum equation is applied to the control volume surrounding the engine and gives:

$$\text{Net Force on Gas in Control Volume} = \text{Rate Momentum Leaves Control Volume} + \text{Rate Momentum Enters Control Volume}$$

But the pressure is equal to ambient everywhere on the surface of the control volume and the static thrust, i.e., the thrust developed when the engine is at rest, is being considered. Hence if T is the force exerted on the flow by the system (this will be equal in magnitude but in the opposite direction to the force on the engine, i.e., to the thrust), it follows that:

$$T = \dot{m}V_{\text{exit}}$$

First consider the thrust without afterburning. In this case:

$$T = (\dot{m}_{\text{air}} + \dot{m}_{\text{fuel}})V_{\text{exit}} = (50 + 50/90) \times 600 = 30333 \text{ N} = 30.333 \text{ kN}$$

Next consider the thrust with afterburning. In this case:

$$T = (\dot{m}_{\text{air}} + \dot{m}_{\text{fuel}})V_{\text{exit}} = (50 + 50/50) \times 730 = 37230 \text{ N} = 37.23 \text{ kN}$$

Therefore the thrust without afterburning is 30.33 kN and the thrust with afterburning is 37.23 kN.

PROBLEM 1.10

A rocket used to study the atmosphere has a fuel consumption rate of 120 kg/s and a nozzle discharge velocity of 2300 m/s. The pressure on the nozzle discharge plane is 90 kPa. Find the thrust developed when the rocket is launched at sea-level. The nozzle exit plane diameter is 0.3 m.

SOLUTION

Applying the momentum equation to a control volume surrounding the engine gives:

$$T - (p_{\text{exit}} - p_{\text{ambient}})A_{\text{exit}} = \dot{m}V_{\text{exit}}$$

Therefore:

$$T - (90000 - 101300) \times \frac{\pi}{4} \times 0.3^2 = 120 \times 2300$$

From this it follows that:

$$T = 275201 \text{ N} = 275.201 \text{ kN}$$

Therefore the thrust developed is 275.2 kN.

PROBLEM 1.11

A solid fuelled rocket is fitted with a convergent-divergent nozzle with an exit plane diameter of 30 cm. The pressure and velocity on this nozzle exit plane are 75 kPa and 750 m/s respectively and the mass flow rate through the nozzle is 350 kg/s. Find the thrust developed by this engine when the ambient pressure is (a) 100 kPa and (b) 20 kPa.

SOLUTION

Applying the momentum equation to a control volume surrounding the engine gives:

$$T - (p_{\text{exit}} - p_{\text{ambient}}) A_{\text{exit}} = \dot{m} V_{\text{exit}}$$

This gives:

$$T - (75000 - p_{\text{ambient}}) \times \frac{\pi}{4} \times 0.3^2 = 350 \times 750$$

From which it follows that:

$$T = (283706 - 0.0707 p_{\text{ambient}}) \text{ N}$$

Hence, if p_{ambient} is 100 kPa:

$$T = (283706 - 7070) = 276636 \text{ N} = 276.6 \text{ kN}$$

Similarly, if p_{ambient} is 20 kPa:

$$T = (283706 - 1414) = 282292 \text{ N} = 282.29 \text{ kN}$$

Therefore the thrusts developed when the ambient pressure is 100 kPa and when it is 20 kPa are 276.6 kN and 282.29 kN respectively.

PROBLEM 1.12

In a hydrogen powered rocket, hydrogen enters a nozzle at a very low velocity with a temperature and pressure of 2000° C and 6.8 MPa respectively. The pressure on the exit plane of the nozzle is equal to the ambient pressure which is 10 kPa. If the required thrust is 10 MN, what hydrogen mass flow rate is required? The flow through the nozzle can be assumed to be isentropic and the specific heat ratio of the hydrogen can be assumed to be 1.4.

SOLUTION

If the subscripts 1 and 2 are used to denote conditions on the inlet and exit planes of the nozzle respectively, then the isentropic relations give:

$$T_2 = \left(\frac{p_2}{p_1} \right)^{(\gamma-1)/\gamma} \times T_1 = \left(\frac{10000}{6800000} \right)^{0.2857} \times 2273 = 352.7 \text{ K}$$

Because the flow is adiabatic there is no heat transfer to the hydrogen in the nozzle so the energy equation gives:

$$\begin{array}{l} \text{Rate Enthalpy plus} \\ \text{Kinetic Energy Leave} \\ \text{Control Volume} \end{array} - \begin{array}{l} \text{Rate Enthalpy plus} \\ \text{Kinetic Energy enter} \\ \text{Control Volume} \end{array} = 0$$

i.e.:

$$\left(c_p T_1 + \frac{V_1^2}{2} \right) - \left(c_p T_2 + \frac{V_2^2}{2} \right) = 0$$

i.e. since the kinetic energy at the inlet is negligible:

$$V_2^2 = 2c_p(T_1 - T_2)$$

But:

$$c_p - c_v = R$$

i.e.:

$$c_p = \frac{\gamma R}{\gamma - 1} = \frac{1.4 \times (8314 / 2)}{0.4} = 14550 \text{ J/kgK}$$

Hence:

$$V_2^2 = 2 \times 14550 \times (2273 - 352.7)$$

i.e.:

$$V_2 = 7475 \text{ m/s}$$

Because the pressure on the exit plane is ambient, the thrust is given by:

$$T = \dot{m}V_2$$

i.e.:

$$10000000 = \dot{m} \times 7475, \text{ i.e., } \dot{m} = 1338 \text{ kg/s}$$

Therefore the required mass flow rate is 1338 kg/s.

PROBLEM 1.13

In a proposed jet propulsion system for an automobile, air is drawn in vertically through a large intake in the roof at a rate of 3 kg/s, the velocity through this intake being small. Ambient pressure and temperature are 100 kPa and 30° C respectively. This air is compressed and heated and then discharged horizontally out of a nozzle at the rear of the automobile at a velocity of 500 m/s and a pressure of 140 kPa. If the rate of heat addition to the air stream is 600 kW, find the nozzle discharge area and the thrust developed by the system.

SOLUTION

The energy equation applied to the system gives:

Rate Enthalpy plus Kinetic Energy Leave Control Volume	-	Rate Enthalpy plus Kinetic Energy enter Control Volume	Rate Heat is Transferred into Control Volume
--	---	--	--

But, because of the low inlet velocity, the kinetic energy at the inlet is negligible. The above equation therefore gives since air flow is being considered:

$$\left(c_p T_{\text{exit}} + \frac{V_{\text{exit}}^2}{2} \right) - (c_p T_{\text{inlet}} + 0) = \dot{q}$$

This equation gives assuming $c_p = 1007 \text{ J/kg K}$:

$$\left(1007 \times T_{\text{exit}} + \frac{500^2}{2} \right) - (1007 \times 303) = 600000$$

which gives:

$$T_{\text{exit}} = 774.7 \text{ K}$$

The exit density is evaluated using the perfect gas law, i.e. by using $p / \rho = RT$. This gives since air flow is being considered:

$$\rho_{\text{exit}} = \frac{140 \times 10^3}{287 \times 774.7} = 0.63 \text{ kg/m}^3$$

Then using:

$$\dot{m} = \rho_{\text{exit}} V_{\text{exit}} A_{\text{exit}}$$

gives:

$$A_{\text{exit}} = \frac{3}{0.63 \times 500} = 0.00952 \text{ m}^2$$

Because no air enters the system in the direction of motion, the momentum equation gives:

$$T - (p_{\text{exit}} - p_{\text{ambient}})A_{\text{exit}} = \dot{m}V_{\text{exit}}$$

which gives:

$$T - (140000 - p_{\text{ambient}}) \times 0.00952 = 3 \times 500$$

This equation then gives if the ambient pressure is assumed to be 101.3 kPa = 101300 Pa:

$$T = 1868.4 \text{ N}$$

Therefore the nozzle discharge area is 0.00952 m² and the thrust is 1868 N.

PROBLEM 1.14

Carbon dioxide flows through a constant area duct. At the inlet to the duct the velocity is 120 m/s and the temperature and pressure are 200° C and 700 kPa respectively. Heat is added to the flow in the duct and at the exit of the duct the velocity is 240 m/s and the temperature is 450° C. Find the amount of heat being added to the carbon dioxide per unit mass of gas and the mass flow rate through the duct per unit cross-sectional area of the duct at inlet. Assume that for carbon dioxide $\gamma = 1.3$.

SOLUTION

The energy equation applied to the system gives:

$$\begin{array}{l} \text{Rate Enthalpy plus} \\ \text{Kinetic Energy Leave} \\ \text{Control Volume} \end{array} - \begin{array}{l} \text{Rate Enthalpy plus} \\ \text{Kinetic Energy enter} \\ \text{Control Volume} \end{array} = \begin{array}{l} \text{Rate Heat is} \\ \text{Transferred into} \\ \text{Control Volume} \end{array}$$

i.e., considering the changes per unit mass flow through the system:

$$\left(c_p T_{\text{exit}} + \frac{V_{\text{exit}}^2}{2} \right) - \left(c_p T_{\text{inlet}} + \frac{V_{\text{inlet}}^2}{2} \right) = \dot{q}$$

where \dot{q} is here the rate of heat transfer to the gas per unit mass flow rate. Taking:

$$c_p = \frac{\gamma R}{\gamma - 1} = \frac{1.3 \times (8314 / 44)}{0.3} = 818.8 \text{ J/kg K}$$

then gives:

$$\dot{q} = 818.8 \times (450 - 200) + \left(\frac{240^2}{2} - \frac{120^2}{2} \right) = 226300 \text{ J/kg} = 226.3 \text{ kJ/kg}$$

Using:

$$\frac{\dot{m}}{A_{\text{inlet}}} = \rho_{\text{inlet}} V_{\text{inlet}} \quad \text{and} \quad \frac{P_{\text{inlet}}}{\rho_{\text{inlet}}} = R T_{\text{inlet}}$$

it follows that:

$$\frac{\dot{m}}{A_{\text{inlet}}} = \left(\frac{P_{\text{inlet}}}{RT_{\text{inlet}}} \right) V_{\text{inlet}} = \left[\frac{700000}{(8314/44) \times 473} \right] \times 120 = 939.9 \text{ kg/s m}^2$$

Therefore the amount of heat added per unit mass of gas is 226.3 kJ/kg and the mass flow rate per unit inlet cross-sectional area is 939.9 kg/s m².

PROBLEM 1.15

Air enters a heat exchanger with a velocity of 120 m/s and a temperature and pressure of 225° C and 2.5 MPa respectively. Heat is removed from the air in the heat exchanger and the air leaves with a velocity 30 m/s at a temperature and pressure of 80° C and 2.45 MPa. Find the heat removed per kg of air flowing through the heat exchanger and the density of the air at the inlet and the exit to the heat exchanger.

SOLUTION

The energy equation applied to the system gives:

$$\begin{array}{l} \text{Rate Enthalpy plus} \\ \text{Kinetic Energy Leave} \\ \text{Control Volume} \end{array} - \begin{array}{l} \text{Rate Enthalpy plus} \\ \text{Kinetic Energy enter} \\ \text{Control Volume} \end{array} = \begin{array}{l} \text{Rate Heat is} \\ \text{Transferred into} \\ \text{Control Volume} \end{array}$$

i.e. considering the changes per unit mass flow through the system:

$$\left(c_p T_{\text{exit}} + \frac{V_{\text{exit}}^2}{2} \right) - \left(c_p T_{\text{inlet}} + \frac{V_{\text{inlet}}^2}{2} \right) = \dot{q}$$

where \dot{q} is here the rate of heat transfer to the gas per unit mass flow rate.

The specific heat, c_p , will be assumed constant and, because air flow is being considered, its value will be taken as $c_p = 1007 \text{ J/kg K}$. Therefore:

$$\dot{q} = 1007 \times (80 - 220) + \left(\frac{30^2}{2} - \frac{120^2}{2} \right) = -134230 \text{ J/kg} = 134.2 \text{ kJ/kg}$$

using $p / \rho = RT$ it follows that:

$$\rho_{\text{inlet}} = \frac{2500 \times 10^3}{287 \times 498} = 17.49 \text{ kg/m}^3$$

$$\rho_{\text{outlet}} = \frac{2450 \times 10^3}{287 \times 353} = 24.18 \text{ kg/m}^3$$

Therefore the rate that heat is removed per kg of air is 134.2 kJ/kg and the density of air at the inlet and the exit is 17.49 kg/m^3 and 24.18 kg/m^3 respectively.

PROBLEM 1.16

The mass flow rate through the nozzle of a rocket engine is 200 kg/s. The areas of the nozzle inlet and exit planes are 0.7 m² and 2.4 m², respectively. On the nozzle inlet plane, the pressure and velocity are 1600 kPa and 150 m/s respectively whereas on the nozzle exit plane the pressure and velocity are 80 kPa and 2300 m/s respectively. Find the thrust force acting on the nozzle.

SOLUTION

The momentum equation is applied to the control volume surrounding the nozzle and gives:

$$\begin{array}{l} \text{Net Force on Gas in} \\ \text{Control Volume} \end{array} = \begin{array}{l} \text{Rate Momentum Leaves} \\ \text{Control Volume} \end{array} + \begin{array}{l} \text{Rate Momentum Enters} \\ \text{Control Volume} \end{array}$$

It is assumed that the pressure is equal to ambient everywhere on the surface of the control volume except on the inlet and exit planes. Hence if T is the force exerted on the flow which will be equal in magnitude but in the opposite direction to the force on the nozzle, i.e., to the thrust, it follows that:

$$T - (p_{\text{exit}} A_{\text{exit}} - p_{\text{inlet}} A_{\text{inlet}}) = \dot{m}(V_{\text{exit}} - V_{\text{inlet}})$$

Hence:

$$\begin{aligned} T &= \dot{m}(V_{\text{exit}} - V_{\text{inlet}}) + (p_{\text{exit}} A_{\text{exit}} - p_{\text{inlet}} A_{\text{inlet}}) \\ &= 200 \times (2300 - 150) + (80000 \times 2.4 - 1600000 \times 0.77) = -610000 \text{ N} = -610 \text{ kN} \end{aligned}$$

Therefore the thrust force on the nozzle is 610 kN this thrust force arising mainly as a result of the pressure difference across the nozzle.
